

BLS 600next SERIES

THREE-FLAP FLAT FILTERING FACEPIECES



BLS 600next filtering facepieces can be used to protect the user from solid and/or liquid nonvolatile particles up to 12* times the Threshold Limit Value (TLV-TWA). Elastics harness attached at four points, internal nose clip and seal ensure an excellent fit for most physiognomies. The dual size is designed to achieve the best fit-testing results.



RIGID INNER CORE

The addition of an innovative inner core provides solidity to the filtering facepiece and high breathability, while maintaining low breathing resistance.

RUBBER ELASTICS

The rubber elastics are made of hypoallergenic latex-free material. The addition of a supporting layer allows the elastics to adhere to the filter body without the use of exposed metal parts.

AVAILABLE WITH EXHALATION VALVE

Low respiratory resistance exhalation valve, which allows hot humid exhaled air to escape more easily and ensures high comfort for the user, making the filtering facepiece suitable for hot humid work environments.

INTERNAL NOSE CLIP

The internal nose clip, placed between the layers of filter material, adapts optimally to the profile of the nose and eyes, guaranteeing good visibility and maximum compatibility with glasses.

NOSE GASKET


Nose gasket in soft polyethylene foam to increase comfort and fit.

SINGLE PACKED

Each mask is packed in an individually sealed PE pouch, to maximize hygiene. It is also the best solution to carry the mask in a pocket, or have it available in vending machines.

AVAILABLE IN TWO SIZES

This series is available in two different sizes, M/L and S, to perfectly fit all face profiles.

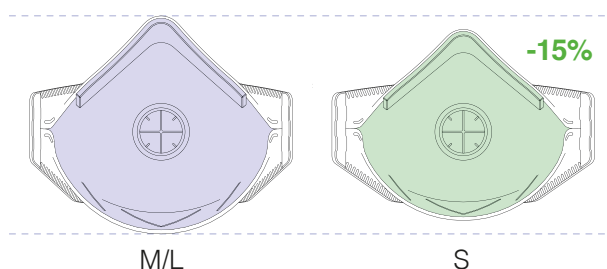

THREE-FLAP FLAT DESIGN

Thanks to the three-flap design, the device adapts perfectly to all facial movements, ensuring maximum protection and efficiency at all times. The folded lower flap allows easy opening of the facepiece without contaminating the inside.

OPTIMAL VISUAL FIELD

The shape of the filtering facepiece guarantees a large filtering surface area, leaving the field of vision totally free.



**RESPIRATORY
PROTECTION
PRODUCTS**

BLS SRL
via dei Giovi, 41
20032 Corno (MI) - Italy
t/f +39 0239310212 / 0266200473
info@blsgroup.it - www.blsgroup.com

BLS 600ne^{xt} SERIES

THREE-FLAP FLAT FILTERING FACEPIECES



MATERIALS

ELASTICS	Polyester (PES) and synthetic rubber
NOSE CLIP	Polypropylene (PP) reinforced with heat-treated metal
VALVE	Polypropylene (PP); synthetic rubber
GASKET	Polyethylene foam (PE)
FILTERING MATERIAL	Polypropylene (PP)

All components in direct contact with user's face are LATEX FREE

BLS 600next filtering facepieces are Made in Europe, just as all of their components.

TECHNICAL DATA

PRODUCT	CODE	SIZE	CLASS of PROTECTION	NPF	SINGLE PACK	VALVE	ELASTICS	GASKET
BLS 670next	8101026	S	FFP2 NR D	12*TLV	✓		Rubber	✓
BLS 670next	8101022	M/L	FFP2 NR D	12*TLV	✓		Rubber	✓
BLS 680next	8101028	S	FFP2 NR D	12*TLV	✓	✓	Rubber	✓
BLS 680next	8101027	M/L	FFP2 NR D	12*TLV	✓	✓	Rubber	✓

*(NR) Non-reusable, maximum 8 hours (R) Reusable (TLV) Threshold Limit Value (NPF) Nominal protective factor
(D) Product passed clogging test with Dolomite dust, simulates high concentration of solid particles*

TRANSPORT

PRODUCT	CODE	SIZE	WEIGHT (g)	Q.TY/BOX	Q.TY/CARTON	CARTON WEIGHT (Kg)	Q.TY/PALLET
BLS 670next	8101026	S	12	16	96	2.2 kg	3072
BLS 670next	8101022	M/L	12	16	96	2.2 kg	3072
BLS 680next	8101028	S	16	10	60	2.0 kg	1920
BLS 680next	8101027	M/L	16	10	60	2.0 Kg	1920

FIELD OF USE

Protection against dusts/fumes/aerosols of average toxicity particles in concentrations up to 12 x TLV (NPF) . Ex. constructions, cement manufacturing, foundries, grinding, sanding, dust painting, fiberglass cutting, wood (not hard wood), food industry. In addition, 670next being an FFP2NRD without valve is the appropriate solution to reduce the possibility of contagion from virus/bacteria, so it can be used in medical applications as well..

LIMITATIONS OF USE

Do not use this mask when:

- Oxygen concentration is < 17%
- The contaminants are unknown or are in concentrations exceeding the NPF
- Gases/vapour are present

STORAGE

SHELF-LIFE	10 years
TEMPERATURE	+5°C/+40°C
RELATIVE HUMIDITY	<60%

BLS 600ne^{xt} SERIES

THREE-FLAP FLAT FILTERING FACEPIECES



AVAILABLE MODELS




BLS 670ne^{xt}
Size M/L - Size S



BLS 680ne^{xt}
Size M/L - Size S

DONNING INSTRUCTIONS

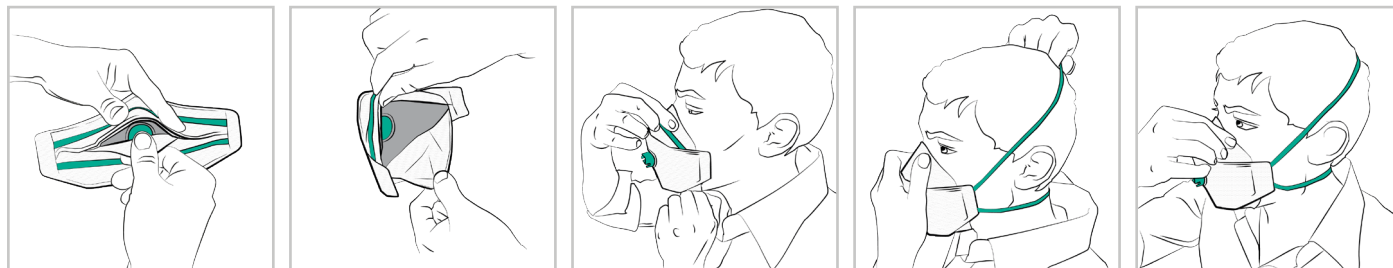

CHECK FIT

Put your hands on the mask and exhale sharply (unvalved mask); inhale sharply (valved mask). If you perceive there is air leakage between the mask and your face you need to readjust the nosebridge and the elastics. Repeat the adjustment until you achieve a proper fit.

NOTE: it is unlikely to achieve a proper fit in case of people with beard

CERTIFICATIONS

BLS filtering facepieces are:

- Certified according to European Regulation 2016/425 (Personal Protective Equipments)
- Certified as PPE of III category, in presumption of conformity to harmonized standard EN 149:2001+A1:2009
- Certified and controlled according to Annex D by Italcert S.r.l. (Notified Body n°0426)
- CE marked

BLS management system is ISO 9001 certified.

IMPORTANT

BLS declines any responsibility, direct or indirect, from any misuse of both devices and instructions. User is responsible for the determination of product compliance with the intended use.